


## HYDRAULIC CARGO ELEVATOR

It is suitable for use in industrial facilities and warehouses. The flexibility in dimensions and capacities make it adaptable for any special requirement.



Manufactured in accordance with machinery directive 2006/42 / EC and EN-81.

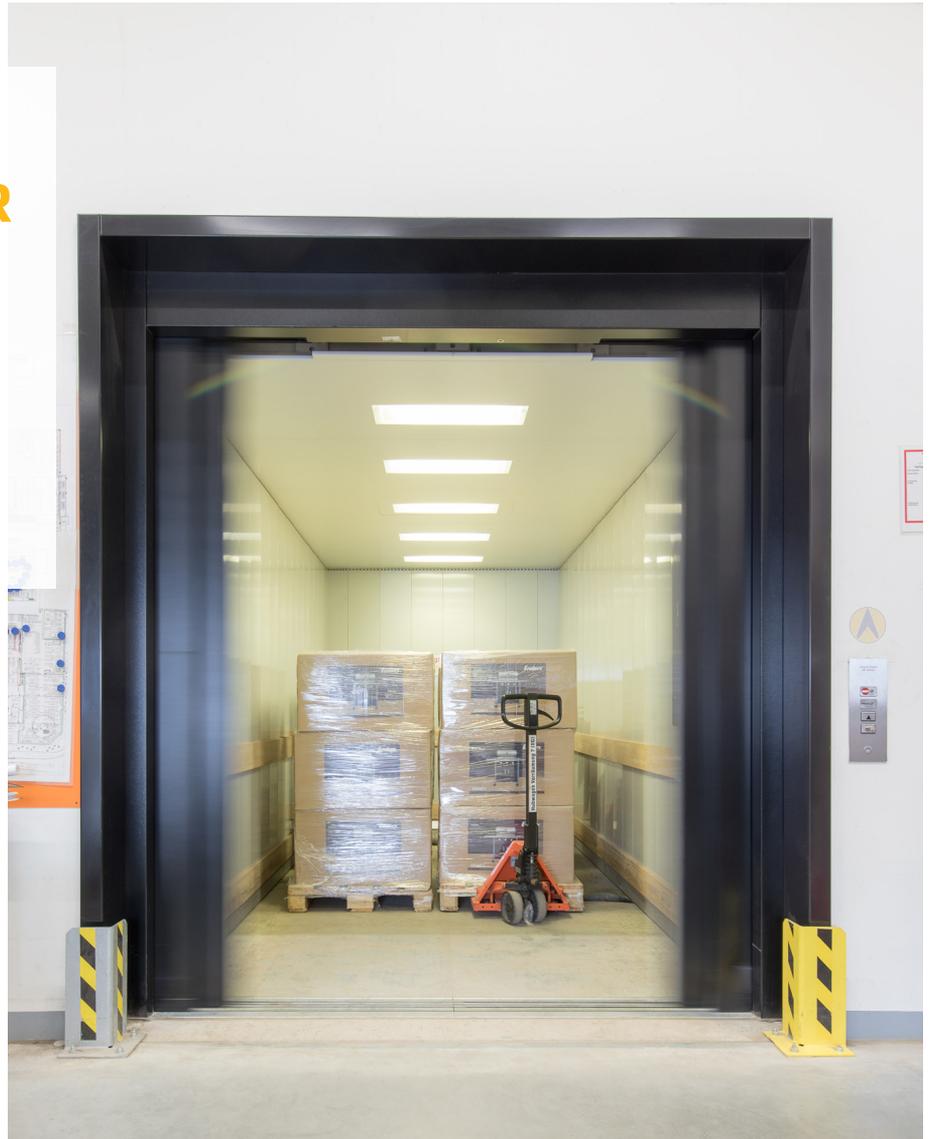

Pre-assembled in rigid steel structure.



Available with platform, half cab, or full cab



Minimum requirements in bucket depth and machine room.



Capacity from 200 to 5,000 Kg.



Maximum speed of 0.6 m / s