

www.alamex.com.tr

ASCENDING TOGETHER







ABOUT ALAMEX

We are a young and dynamic company, we began operations in Latin America in 2011, with more than 20 years of experience. At Alamex, we design top-quality lifting solutions with cutting-edge innovations.

Alamex is a company specialized in designing, developping, manufacturing, distributing, installing, and maintaining high-tech lifting solutions. We produce all types of elevator systems including passsenger elevators, home elevators, platform elevators, dumbwaiters, construction elevators, cargo elevators, and more.

We have exports to more than 55 countries in Europe, North America, South America, Africa, Asia & Australia.

All our products are manufactured in accordance with the lastes European Standards for Safety and Quality, which guarantees high durability with minimal maintainance.



Elevator Systems

- Passenger Elevator
- Home Elevator
- Platform Elevator
- Service Elevator (Dumbwaiter)
- Cargo Elevator



Parking Systems


- Car Lift Platform
- Car Stack
- Automated Parking Systems



Escalators & Moving Walkways

- Escalators
- Moving Walkways



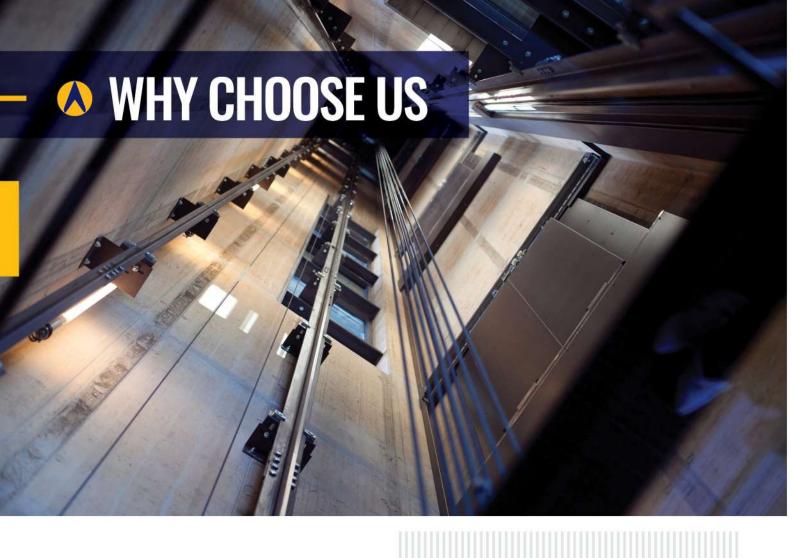





Lifting solutions from conceptualization and design to specify the installation and maintenance.



National and international certifications of compliance with the latest safety and quality standart.









24/7 custumer support in 6 languages













CERTIFICATES













MINI INTELLIGENT

PAD

EU CERTIFICATE

INTELLIGENT

EAC









ISO 9001

Devices For Locking Landing Doors

ALAMEX ISO

ALAMEX MR



ALAMEX MRL



OVERSPEED GOVERNOR



SAFETY GEAR



HYDRAULIC BUFFER



Devices For Locking Cabin Doors

INTERNATIONAL PRESENCE



Thanks to our professional team, we could improve our product quality and develop new technologies to the extend that we bacame internationally well-known for our unique products and services.

Our exports extends internationally, currently to more than 55 countries in 5 continents around the world.

We also provide a 24/7 customer support in 6 languages.















Barbados Canada Costa Rica Guatemala Mexico Panama The Salvador

USA

Colombia Paraguay

Algeria Egypt Ethiopia Kenya Libya Mauritania Morocco Mozambique Tunisia Zanzibar

Belarus Danimark Greece Italy Netherlands Romania Russia Slovakia Ukraine

Armenia Bahrain Dubai Azerbaijan Georgia Iraq Jordan Kazakhstan Kuwait Lebanon Oman Palestine **Philippines** Qatar Saudi Arabia Syria Turkmenistan UAE

Australia



HOME LIFT

ASCENDING TOGETHER

ELEVATOR SYSTEMS

HYDRAULIC

CARGO ELEVATOR

It is suitable for use in industrial facilities and warehouses. The flexibility in dimensions and capacities make it adaptable for any special requirement.







Manufactured in accordance with machinery directive 2006/42 / EC and EN-81.



Pre-assembled in rigid steel structure.



Available with platform, half cab, or full cab



Minimum requirements in bucket depth and machine room.



Capacity from 200 to 5,000 Kg.



Maximum speed of 0.6 m / s

HYDRAULIC ELEVATOR

PLATFORM ELEVATOR

At Alamex we present a new lifting solution for limited spaces, where the dimensions of some architectural space are not possible to place a conventional elevator, giving rise to the flexibility and easy installation of a home lift.

The great advantages of the home lift is that it optimizes the available spaces in new or existing buildings, having minimal electrical consumption, an avant-garde design and easy installation.



Minimum requirements in bucket depth and machine room.



Capacity from 200 to 5,000 Kg.



Maximum speed of 0.6 m / s



Manufactured in accordance with machinery directive 2006/42 / EC and EN-81.



Pre-assembled in rigid steel structure.



Available with platform, half cab, or full cab




ELEVATOR SYSTEMS



ENCLOSED PLATFORM LIFT



Easy and trouble-free installation in any area as it does not require a pit

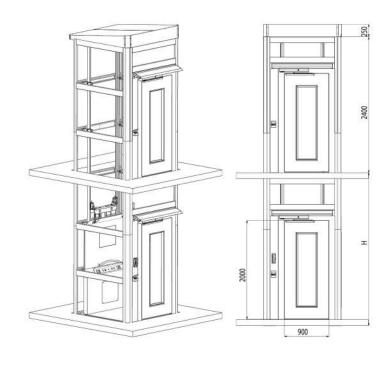



EXPLANATION

This model has wide area of usage. The drive system of the lift can be Hydraulic or Screw. It can be used safely and meet your requirements indoor and outdoor The lift is easy to install and can be placed directly onto the floor, not required pit. It does not need extra construction during the installation. It has 7 stops and helps to customer not to waste time. The outdoor lift is equipped to resist to extreme weather conditions.

Area of usage: Schools, Temples, Police stations, Rehabilitation centers, Public institutions, Private health institutions, Training centers. KP 901 model is produced within the standards of 2006/42 / EC regulations and supplied to the market with CE certificate. User and environment safety are in the highest level.







TECHNICIAL SPECIFICATIONS

Drive Type	Hydraulic / Worm Screw
Load Capability	315 / 400 kg
Distance	15 mt
Speed	0,15 mt/sec
Platform Internal Dimensions	1100*1400 mm / (Standard Dimension)
Platform External Dimensions	1600*1600 mm / (Standard Dimension)
Pit	120 mm – 150 mm – 250 mm
Door	Fully Automatic
Emergency Rescue System	Ups / Manual
Announcment System	3 Languages / English, Arabic, France, Spain
Intercom System	Available
Main power requirement	220 V AC - 50 Hz -Monofaze / 380 V AC - 50 Hz -Three Phase



CABIN HEIGHT 2.500 mm



TOTAL SPEED 0,15 m/s



DRIVE SYSTEM Hydraulic - Screw



INSTALLATION In 3-4 Days



GUARANTEE 2 Years



TRAVEL HEIGHT 15 m



POWER SUPPLY 220 - 380 v (AC)



FLOOR NUMBER



CABIN OPTIONS Platform - Cabin








ELEVATOR SYSTEMS

ENCLOSED PLATFORM LIFT

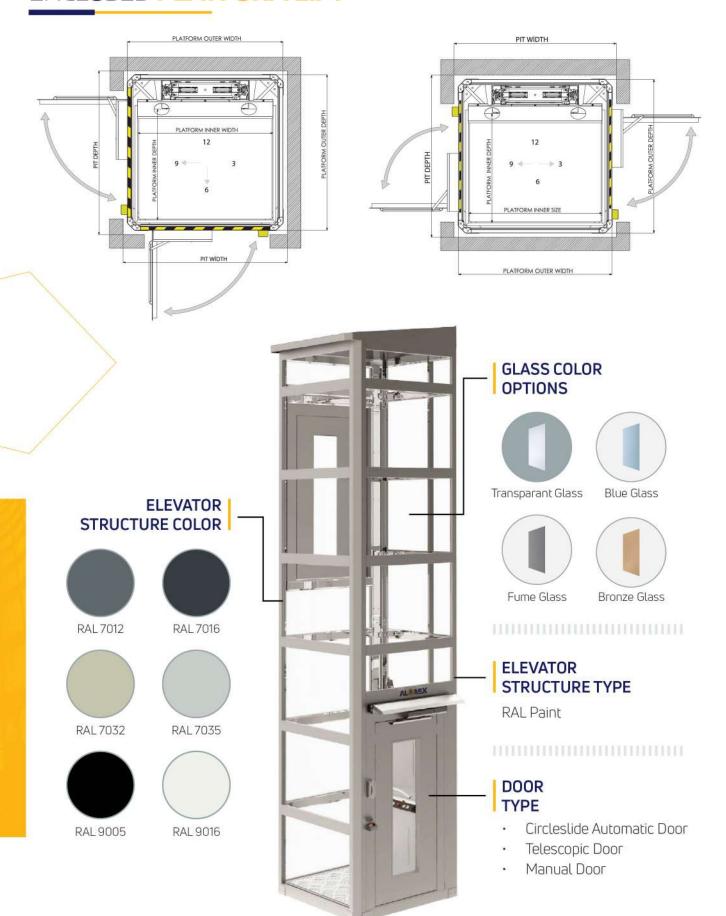




CABIN - TELESCOPIC CLOSED PLATFORM



Easy and trouble-free installation in any area as it does not require a pit

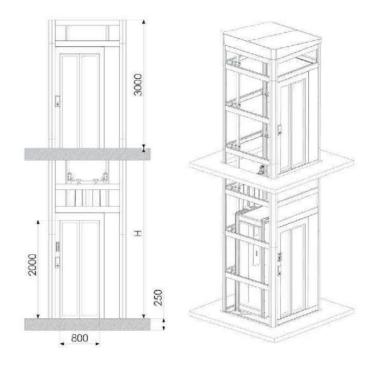



EXPLANATION

This model has wide area of usage. The drive system of the Lift can be Hydraulic or Screw. It can be used safely and meet your requirements indoor and outdoor The lift is easy to install and can be placed directly onto the floor, not required pit. It does not need extra construction during the installation. It has 7 stops and helps to customer not to waste time. The outdoor lift is equipped to resist to extreme weather conditions.

Area of usage: Schools, Temples, Police stations, Rehabilitation centers, Public institutions, Private health institutions, Training centers. KP 901 model is produced within the standards of 2006/42 / EC regulations and supplied to the market with CE certificate. User and environment safety are in the highest level.



ELEVATOR SYSTEMS



TECHNICIAL SPECIFICATIONS

Product Information	KP 901 Cabin type technical specification
Number of Stop	Min. 2 stops (Diagonal)
Travel Distance	Minimum 500 mm - Maximum optional
Speed	Minimum 0,07 mt/sn-Maximum 0,40 mt/sn
Carrying capacity	Minimum 250 kg - Maximum 400 kg
Steel Structure	Laser Cut Steel ESB Painted
Steel Structure Coating	White Glass - Fumed Glass Colored Glass (Green, yellow, Blue) Composite (colored)
Doors	Swing Door (Circular Automatic Door) Telescopic Door (Full Automatic)
Floor door size	Minimum 600x2000mm Maximum 900X2000 mm
Cabin door size	Minimum 600x2000mm Maximum 900X2000 mm
Platform inner size	Minimum 750x440mm Maximum 1100*1300 mm
Platform outer size	Minimum 1000x1000mm Maximum 1600*1600 mm
Platform outer color	RAL 7012 - 7016 - 7032 - 7035 - 9006 - 9016
Cabin	Yes
Cabin coating	304 Quality Stainless Steel Decostil Cabin - Glass Cabin - Wooden Cabin
Drive system	Double Speed Hydraulic, Soft Stop Start, Silent Unit
Pit depth	Minimum 250 mm



CABIN HEIGHT 2.500 mm



TOTAL SPEED 0,15 m/s-0,40 m/s



DRIVE SYSTEM Hydraulic



INSTALLATION In 4 Days



GUARANTEE 2 Years



TRAVEL HEIGHT 15 m



POWER SUPPLY 220 - 380 v (AC)



FLOOR NUMBER
7




CABIN OPTIONS Platform - Cabin









CABIN - TELESCOPIC CLOSED PLATFORM

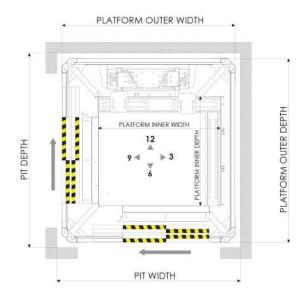

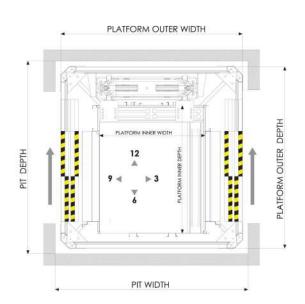

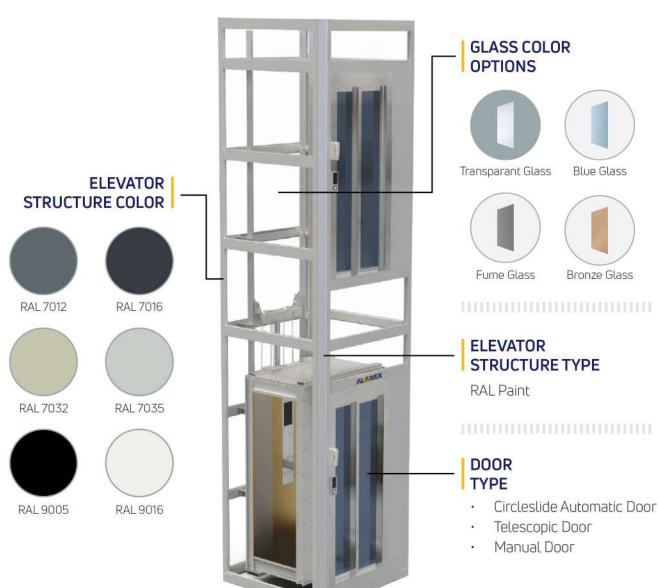




OPEN PLATFORM LIFT



User and environmental safety is kept at the highest Level

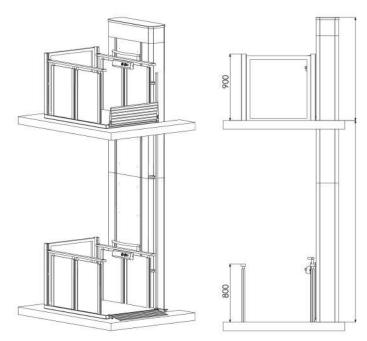



EXPLANATION

This model structured on double pillars. It has high safety standards and stylish. It can be used safely inside and outside. The outer cover is made of steel sheet with a electrostatic coating (stainless steel cover is optional). Does not required pit and can travel up to 3 meter height.

Areas of usage; School, Temples, Police station, Rehabilitation center, Public institutions, Hotels, Health facilities, Training centers, Housing estates.

MK 901 model is manufactured within the standards of 2006/42 / EC and is presented to the market with CE marking. User and environment safety are in highest level.



16





TECHNICIAL SPECIFICATIONS

Drive Type	Hydraulic / Screw
Carrying Capacity	315 kg
Maximum Travel Distance	3 mt
Working Speed	0,15 mt/sec
Platform Internal Dimensions	900*1400 mm / (Standart Dimension)
Platform External Dimensions	1400*1400 mm / (Standard Dimension)
Pit	100 mm
Door	Automatic Locking-Safety Switch (Optional)
Controls	Locked Controls On Floors And Platform Emergency Stop Button
Safety	Anti Jamming Switches Under The Table / Bellows (Optional)
Main power requirement	220 V AC -50 Hz-Monofaze 220 V AC- 50 Hz-Single Phase 380 V AC -50 Hz-Monofaze 380 V AC- 50 Hz-Single Phase



CABIN HEIGHT 1000 mm



TOTAL SPEED 0,15 m/s



DRIVE SYSTEM Hydraulic - Screw



INSTALLATION In 1-2 Days



GUARANTEE 2 Years



TRAVEL HEIGHT 3 m



POWER SUPPLY 220 - 380 v (AC)



FLOOR NUMBER










OPEN PLATFORM LIFT

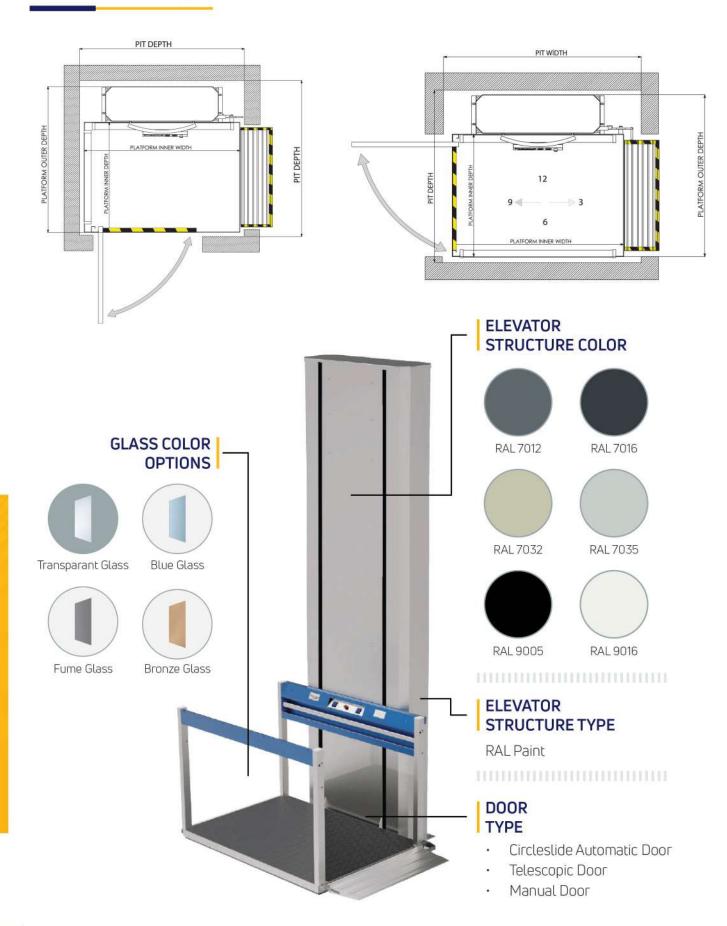

TRACTION ELEVATOR SERVICE ELEVATOR


It is a small service traction elevator with or without a machine room for small capacities. It is suitable for service jobs such as libraries, restaurants, hotels, department stores or residential.

SERVICE ELEVATOR GUILLOTINE


DOOR DOOR



Counter Dumbwaiter

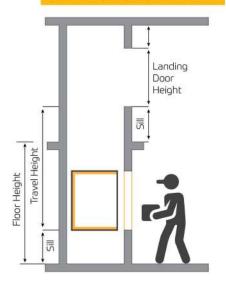

Floor Dumbwaiter

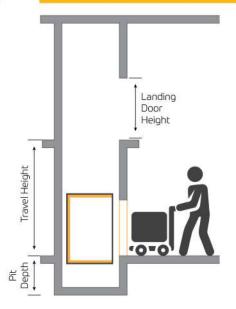



Manufactured in accordance with the machinery directive 2006/42 / EC and EN-81.



Capacity from 100 to 300 Kg.



Travel up to 30 meters (10-15 stops approximately). Capacity: 300 Kg.



Smooth and quiet operation. Quick and easy installation.




Minimum machine room space. No need for a pit.



REFERENCES



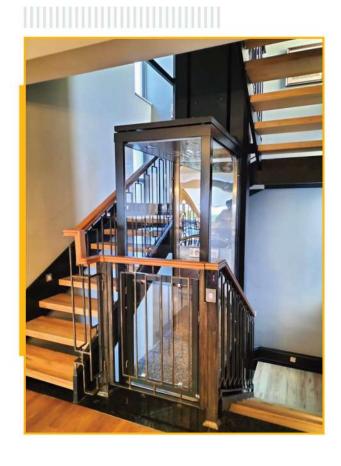





REFERENCES (A)














Elevator systemswe export to the **World**



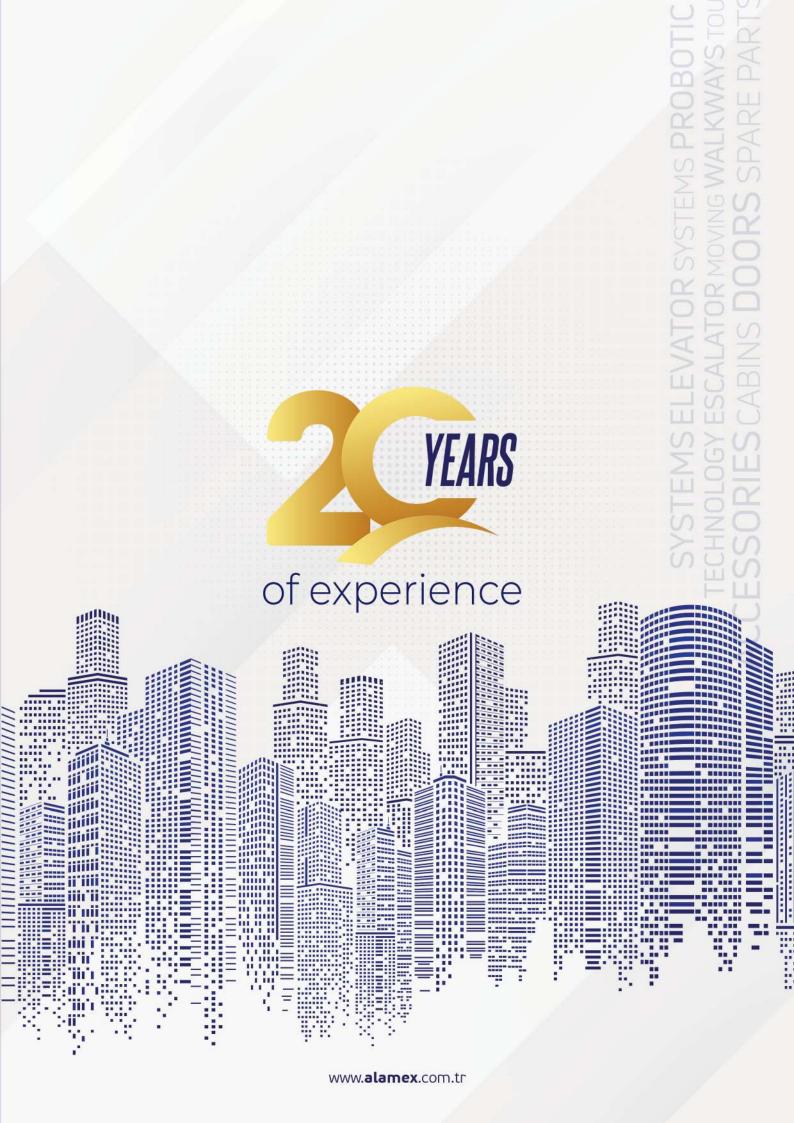





ALAMEX ASANSÖR SANAYI TICARET LIMITED ŞIRKETI

- Fevzi Çakmak Mah. İmsan Sanayi Sit.
 Gülistan Cad. No:40/1 42050 Selçuklu/KONYA
- **%** +90 (332)503 15 08
- info@alamex.com.tr
- www.alamex.com.tr

ASCENDING TOGETHER

